
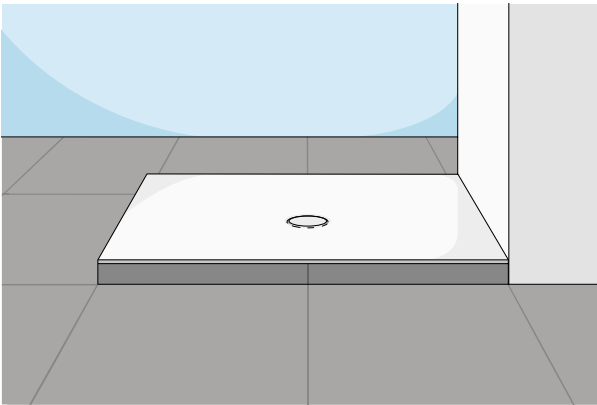
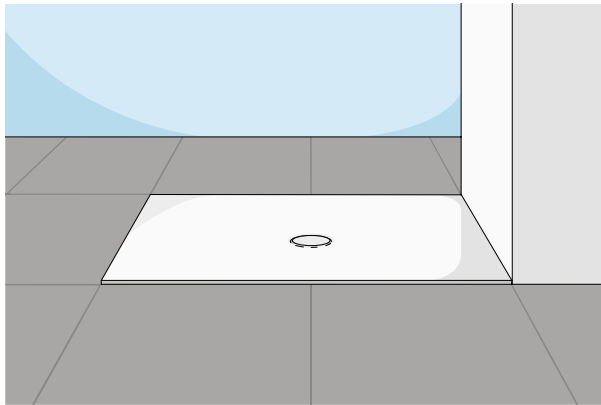


Sectional drawings
BetteFloor with installation system Universal

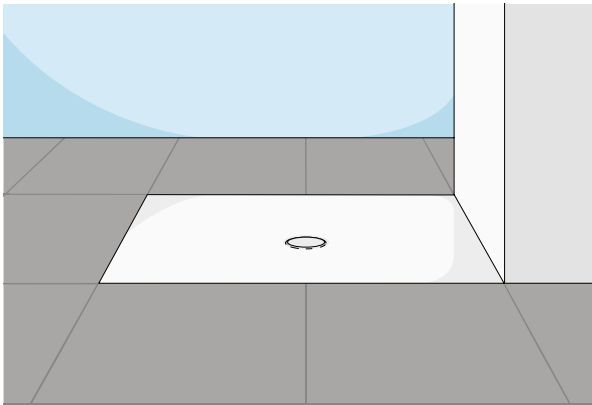


shower waste


BetteSolid 50

B598-
0,6 l/s
with side outlet,
water seal height 50 mm,
as per EN 274


Flush-to-floor installation

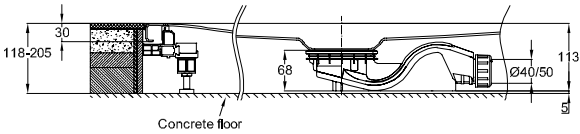

Virtually Flush-to-floor installation



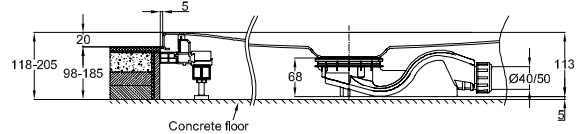


Installation above the floor

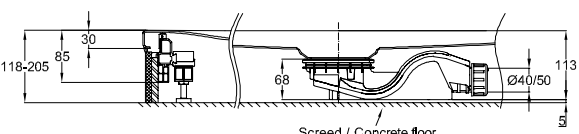




BetteSolid 30

B597-
0,6 l/s
with side outlet,
water seal height 30 mm

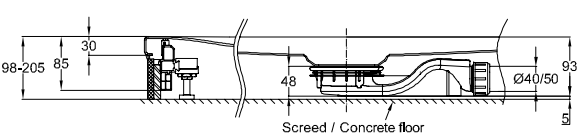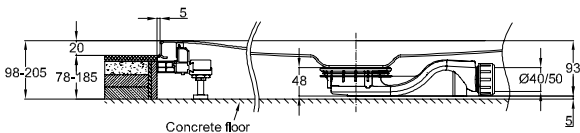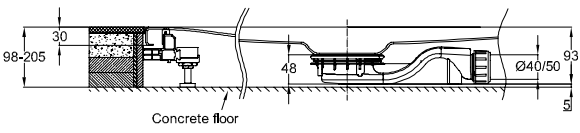




BetteScope

B574-
0,85 l/s
with side outlet,
water seal height 50 mm,
as per EN 274

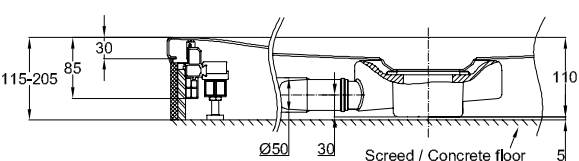
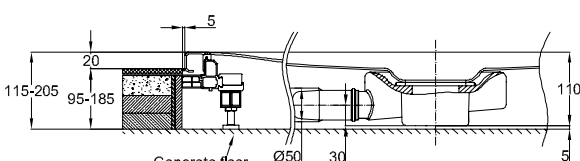
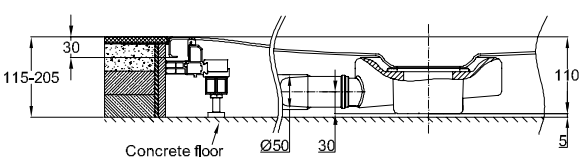


BetteDown

B594-
0,6 l/s
with vertical outlet,
water seal height 50 mm,
as per EN 274

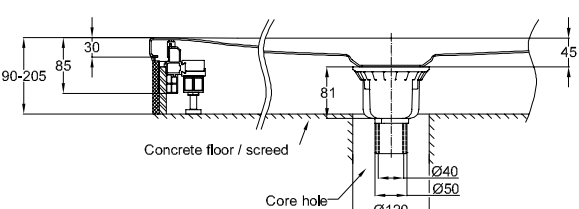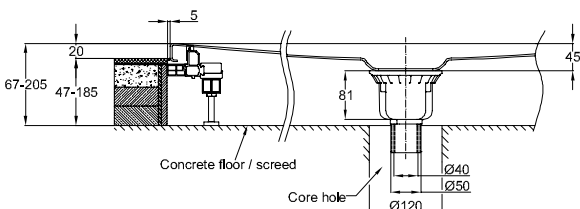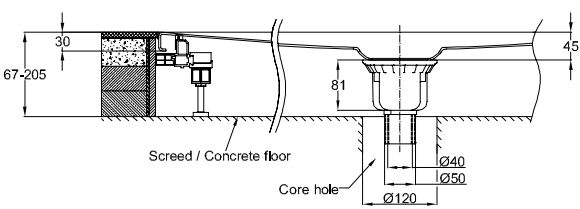

Sectional drawings
BetteFloor with installation system Basic

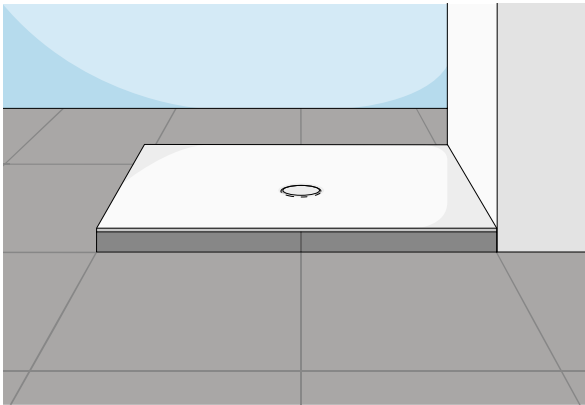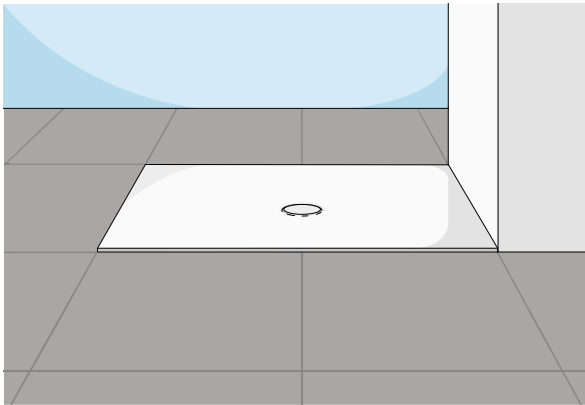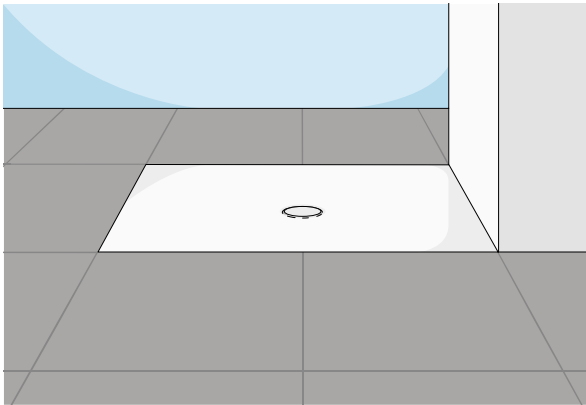


shower waste


BetteSolid 50

B598-*
0,6 l/s
with side outlet,
water seal height 50 mm,
as per EN 274


Flush-to-floor installation

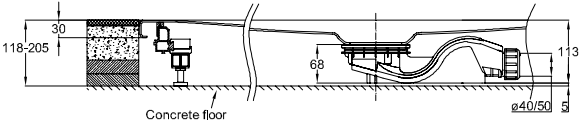

Virtually Flush-to-floor installation



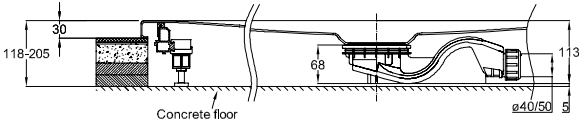


Installation above the floor

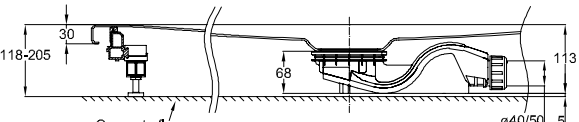




BetteSolid 30

B597-*
0,6 l/s
with side outlet,
water seal height 30 mm






BetteScope

B574-*
0,85 l/s
with side outlet,
water seal height 50 mm,
as per EN 274

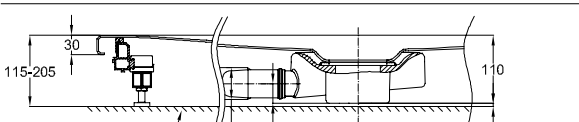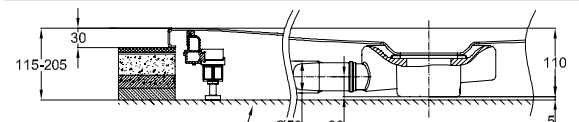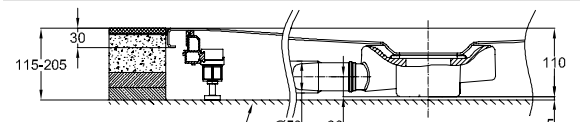


BetteDown

B594-*
0,6 l/s
with vertical outlet,
water seal height 50 mm,
as per EN 274

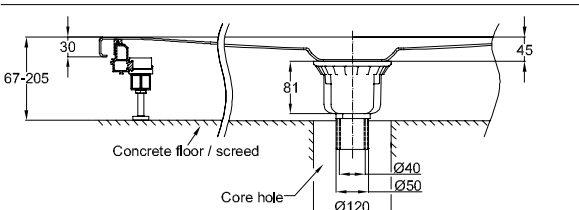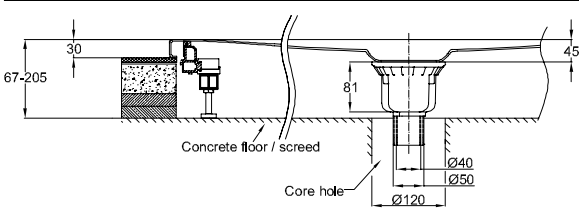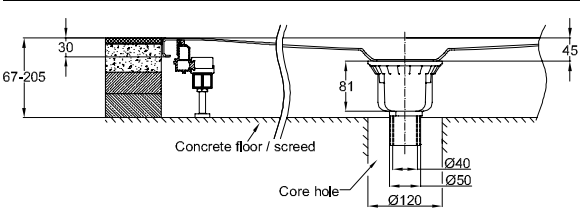

Sectional drawings

BetteFloor with BetteLevel

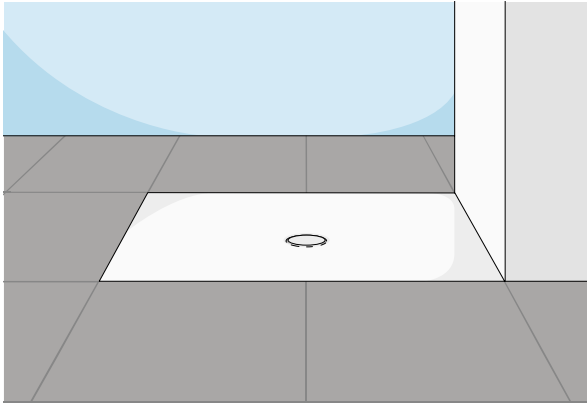


shower waste

Flush-to-floor installation


BetteSolid 50

B598-
0,6 l/s
with side outlet,
water seal height 50 mm,
as per EN 274

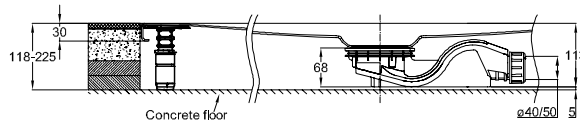


BetteSolid 30

B597-
0,6 l/s
with side outlet,
water seal height 30 mm




BetteScope

B574-
0,85 l/s
with side outlet,
water seal height 50 mm,
as per EN 274

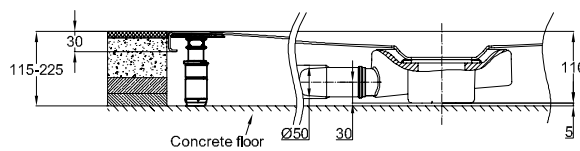


BetteDown

B594-
0,6 l/s
with vertical outlet,
water seal height 50 mm,
as per EN 274

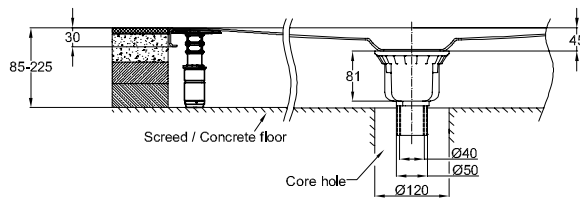

Sectional drawings BetteFloor with Minimum support

BETTE

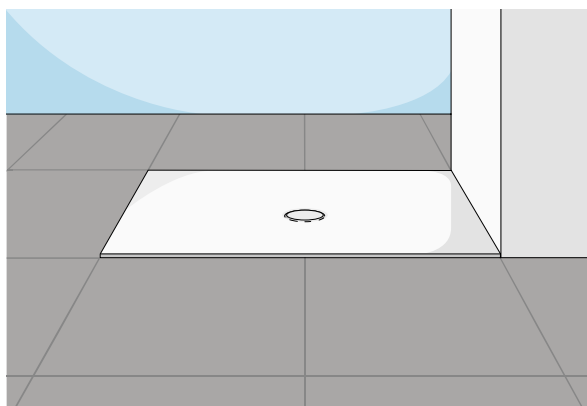


BetteFloor

shower waste

Virtually Flush-to-floor installation


BetteSolid 50

B598-
0,6 l/s
with side outlet,
water seal height 50 mm,
as per EN 274

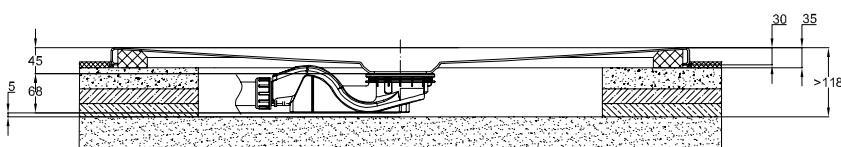


BetteSolid 30

B597-
0,6 l/s
with side outlet,
water seal height 30 mm

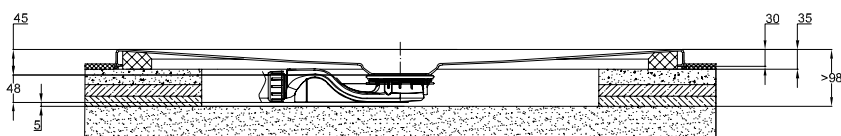


BetteScope

B574-
0,85 l/s
with side outlet,
water seal height 50 mm,
as per EN 274

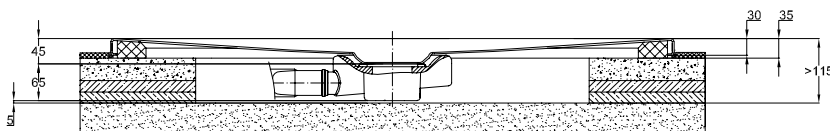


BetteDown

B594-
0,6 l/s
with vertical outlet,
water seal height 50 mm,
as per EN 274

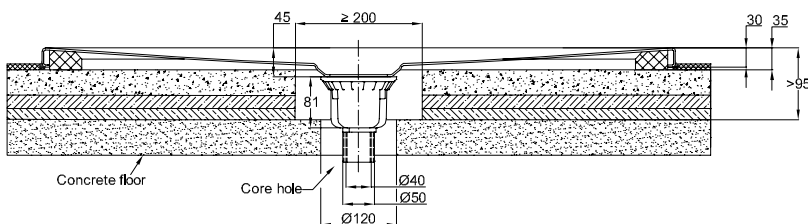

Sectional drawings BetteFloor with Minimum support / Easy Connect

BETTE

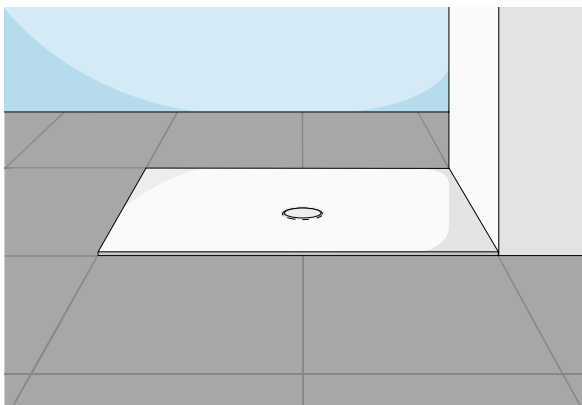


BetteFloor

shower waste

Virtually Flush-to-floor installation

BetteSolid 50

B598-
0,6 l/s
with side outlet,
water seal height 50 mm,
as per EN 274

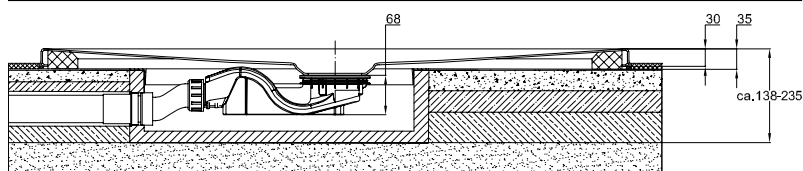

BetteSolid 30

B597-
0,6 l/s
with side outlet,
water seal height 30 mm

